

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 113 286 A2**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
04.07.2001 Bulletin 2001/27

(51) Int Cl.7: **G01R 33/34, G01R 33/341**

(21) Application number: **00311406.3**

(22) Date of filing: **19.12.2000**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Fujita, Hiroyuki**
Highland Heights, Ohio 44143 (US)
• **Demeester, Gordon D.**
Wickliffe, Ohio 44092 (US)

(30) Priority: **28.12.1999 US 473070**

(74) Representative: **Waters, Jeffrey**
Marconi Intellectual Property
Marrable House
The Vineyards
Gt. Baddow
Chelmsford Essex CM2 7QS (GB)

(71) Applicant: **Marconi Medical Systems, Inc.**
Cleveland, Ohio 44143 (US)

(54) **Quadrature RF coil for MRI systems**

(57) A quadrature RF coil assembly (50) is employed for quadrature excitation and/or reception in an open or vertical field magnetic resonance apparatus. The quadrature RF coil (50) includes a plurality of parallel rung elements (70, 72, 74, 76, 78). A pair of electrical conductive end segments (80, 82) connect the plurality of rung elements. Capacitive elements (C_V , C_A) interrupt a central rung element and the end segments. Preferably, the capacitive elements (C_V , C_A) are arranged in a high-pass configuration such that the two highest resonant modes, an odd mode (90) and an even mode (92), are tuned to have peak responsivity to a common imaging frequency. The odd mode (90) is responsive to magnetic fields which are normal to the coil (50), while the even mode is responsive to magnetic fields which are parallel to the coil (50) and perpendicular to the main magnetic field. In one embodiment, the quadrature coil (50) is curved such that it is partially wrapped around a portion of a subject (100) with the rung elements (70, 72, 74, 76, 78) of the coil (50) parallel to the main magnetic field B_0 . The quadrature coil (50) provides improved B_1 field uniformity and greater tuning stability due to reduced localized electric field effects. The coil (50) provides greater accessibility for interventional procedures conducted in a vertical field or open magnetic resonance imaging system.

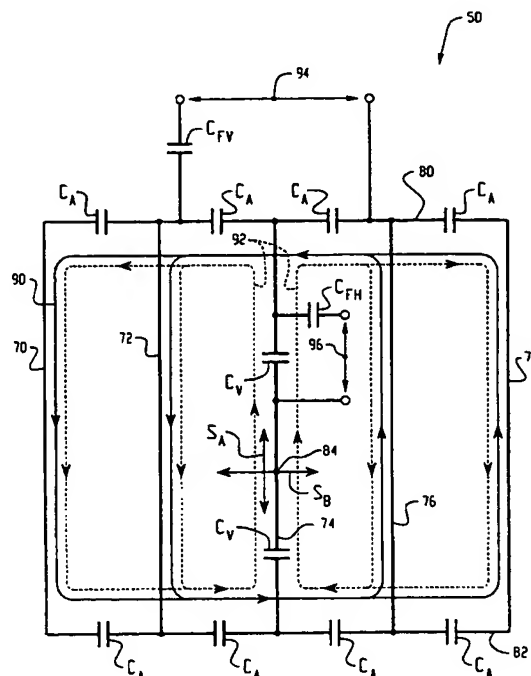


Fig. 2

Description

[0001] The present invention relates to the field of magnetic resonance. It finds particular application in conjunction with magnetic resonance imaging and open magnetic resonance imaging systems and will be described with particular reference thereto. However, it is to be appreciated that the present invention will also find application in conjunction with other magnetic resonance imaging and spectroscopy systems, particularly those in which the direction of the main magnetic field is in the plane of the radio frequency coils.

[0002] Conventionally, magnetic resonance imaging procedures include disposing the patient in a substantially uniform, temporally constant main magnetic field B_0 . The resulting magnetization of the sample is manipulated with radio frequency magnetic fields which are applied to the examination region so as to resonate polarized dipoles and produce magnetic resonance signals. The signals are received and used to produce images or spectra from the sample.

[0003] The direction of the main magnetic field in a high field system is generated along the central bore of an annular magnet assembly, i.e., the B_0 field aligns with the central axis of the patient. In bore-type systems, ladder RF coils have been utilized for quadrature detection. For such systems, U.S. Patent No. 5,898,306 by H. Liu and C. Truitt describes a ladder resonator quadrature surface coil which is a low-pass configuration. The coil consists of uniformly spaced axial conductive elements, rungs, sandwiched between two conductive end elements. The low-pass ladder coil described generates quadrature magnetic RF fields B_1 from two resonant modes of the structure. One of the B_1 fields is oriented perpendicular to the plane of the coil and the other is oriented in the direction of the end conductors, perpendicular to the rungs. By properly orienting the coil in the plane of the patient, both modes generate B_1 fields perpendicular to the B_0 field. In this orientation, the coil receives and transmits resonant RF signals in quadrature.

[0004] The Liu coil describes rung elements which are interrupted by a plurality of capacitive elements arranged in a symmetric low-pass configuration. The coil detects both even and odd current modes in the lower resonant frequencies. The tuning capacitor values are often quite small - on the order of a picofarad. This results in coil tuning instability.

[0005] In addition, a symmetrical degenerate band-pass configuration has been described by Boskamp, et al. Tuning of such a band-pass coil is achieved by adjusting capacitive elements in both the rung and end conductors. This tuning process tends to be time-consuming, hence expensive.

[0006] However, not all magnetic resonance systems employ a horizontal B_0 magnetic field. Vertical field or open magnetic resonance imaging systems typically include a pair of parallel disposed pole pieces, which are often interconnected by a ferrous flux return path. Elec-

trical coils for inducing the vertical main magnetic field are disposed along the flux return path or at the poles. Typically, the pole pieces are positioned horizontally such that a vertical field is created therebetween. Many advantages are realized with the use of open vertical field systems, such as openness for patient comfort and greater patient accessibility for the physician.

[0007] The RF coils used to manipulate magnetization as well as receive the magnetic resonance signals are different for vertical field open systems than for bore type systems. In a vertical field system, the B_0 orientation is directed across the patient as opposed to along the long axis of the patient, from head to toe. Useful RF fields, either linear or quadrature, are oriented perpendicular to the B_0 field. Thus, vertical field systems have used solenoid coils oriented along the patient axis to detect one orientation of field and a saddle coil or Helmholtz pair to detect an orthogonal transverse field. It is also desirable to have coils that conform to the openness requirements of the magnet. Volume coils for a bore type machine are often cylindrical, similar to the magnet bore. RF coils for a vertical field system are often sheets parallel to the pole faces to maintain the desired openness of the magnet. Transmit RF coils for open systems often include a pair of butterfly coils mounted parallel to the poles of the magnet. This conforms well to the open uses of the system while providing for quadrature excitation.

[0008] Early vertical field systems had a B_0 field of 0.2 to 0.35 Tesla with hydrogen magnetic resonance at frequencies of roughly 8 to 15 MHz. As field strength increases, the resonance frequency increases proportionally, requiring different coil design techniques. At low fields, solenoids and current loop coils are often used, whereas at higher frequencies, resonant structures, such as birdcage or ladder coils, are used. Also, at low fields, the receive coil thermal noise dominates while at magnetic fields of 1 Tesla or more, patient thermal noise dominates. Consequently, in high field systems, smaller receive coils or arrays of smaller coils are used to limit the patient volume contributing to the noise. Quadrature coils are usually used at higher fields because the patient noise seen by the orthogonal coils is also orthogonal resulting in a combined receive coil signal-to-noise improvement.

[0009] In accordance with one aspect of the present invention, an open magnetic resonance apparatus generates a temporally constant main magnetic field through an examination region. An RF transmitter transmits radio frequency pulses to a quadrature radio frequency coil to excite resonance in selected dipoles in the examination region such that the dipoles generate resonance signals at a characteristic resonance frequency. A quadrature radio frequency coil assembly receives the resonance signals from the resonating dipoles and a radio frequency receiver demodulates the resonance signals received from the quadrature RF coil. The quadrature RF coil includes a plurality of parallel

rung elements disposed parallel to the main magnetic field. Electrical conductive ends connect the plurality of rung elements. A plurality of capacitive elements interrupt at least one of the rung elements and ends.

[0010] In accordance with another aspect of the present invention, a method of magnetic resonance imaging in an open MRI system is provided in which a temporally constant main magnetic field is generated through an examination region and gradient magnetic fields are generated for spatial selection and position encoding. The method includes positioning a quadrature RF ladder coil parallel to the main magnetic field, said coil supporting two resonant modes. Further, the two resonant modes are matched to a common resonance frequency of the dipoles of interest. Magnetic resonance is excited in the dipoles of interest in the examination region and induced magnetic resonance signals are detected using the quadrature RF ladder coil. The detected signals which are at and above the common imaging frequency are passed to a receiver and reconstructed into an image representation.

[0011] One advantage of the present invention is that it provides a planar RF transmitter particularly adapted for use at higher fields.

[0012] Another advantage of the present invention is that it allows for quadrature excitation and/or reception within the examination volume.

[0013] Another advantage of the present invention is that it makes possible a better signal-to-noise ratio in higher vertical field systems.

[0014] Another advantage of the present invention is that it makes possible better B_1 field uniformity.

[0015] Another advantage of the present invention is that easy manufacture is possible.

[0016] Another advantage of the present invention resides in an optimized current distribution that supports both even and odd current distributions.

[0017] Yet another advantage of the present invention is the ease of tuning due to reduced localized electric field effects that can lead to tuning instability.

[0018] Another advantage of the present invention is that it allows for a more open RF coil for vertical field systems.

[0019] Another advantage of the present invention is that it facilitates surgeon and attendant access for interventional procedures.

[0020] Ways of carrying out the invention will now be described in detail, by way of example, with reference to the accompanying drawings, in which:

FIGURE 1 is a diagrammatic illustration of a magnetic resonance imaging system in accordance with the present invention;

FIGURE 2 is a diagrammatic illustration of an exemplary high-pass RF ladder coil in accordance with the present invention;

FIGURE 3 is a perspective illustration of a flexible RF ladder coil to be used for head imaging in accordance with the present invention; and

FIGURE 4 is a top view of the coil of FIGURE 3.

[0021] With reference to FIGURE 1, in an open MRI system, an imaging or examination region 10 is defined between pole pieces 12, 12'. The first or upper pole piece 12 is surrounded by an annular magnet 14, preferably a superconducting magnet. To this end, the magnet is disposed in an annular helium container or can 16 that is surrounded by a vacuum dewar 18. The pole piece 12 is preferably circularly symmetric or oval with a symmetrically contoured face 20.

[0022] A second, lower pole piece 12' is disposed below the upper pole piece 12 and on the other side of the examination region 10. The second pole piece is again surrounded by a superconducting magnet 14' and has a contoured pole face 20' for improving magnetic field linearity in the examination region 10.

[0023] The pole pieces are disposed centrally in an RF room 22 which is defined by or lined with iron, including a ceiling layer 24, a floor layer 26, and a wall layer 28. The ceiling, floor, and wall layers are composed of multiple sections which are mechanically connected together such that they define a ferrous flux return path. The superconducting magnets 14, 14' induce magnetic flux in the ferrous flux return path and the B_0 field through the examination region. It is to be appreciated that the open MRI system may operate with or without pole pieces and with or without a flux return path.

[0024] For imaging, magnetic field gradient coils 30, 32 are disposed on either side of the examination region 10, near the pole pieces 12, 12'. In the preferred embodiment, the gradient coils are planar coil constructions which are connected by gradient amplifiers 34 to a gradient magnetic field controller 36. The gradient magnetic field controller 36 causes current pulses which are applied to the gradient coils such that gradient magnetic fields are superimposed on the temporally constant and uniform magnetic field throughout the examination region. The gradient fields create magnetic field gradients in the examination region 10 along a longitudinal or z-axis, a vertical or y-axis, and a transverse or x-axis.

[0025] In order to excite magnetic resonance in dipoles of a subject disposed in the examination region 10, radio frequency coils 38, 40 typically are included between the gradient coils 20, 22 and the imaging region 10. At least one radio frequency transmitter 42, preferably a digital transmitter, causes the radio frequency coils to transmit radio frequency pulses requested by a radio frequency pulse controller 44 to be transmitted into the imaging region 10. A sequence controller 46, under operator control, retrieves an imaging sequence from a sequence memory 48. The sequence controller 46 provides the sequence information to the gradient controller

36 and the radio frequency pulse controller 44 such that radio frequency and gradient magnetic field pulses in accordance with the selected sequence are generated.

[0026] Typically, the radio frequency coils 38, 40 are general purpose coils that provide excitation of nuclei in the imaging region 10 and are suitable for receiving resonance signals. On the other hand, specialty surface coils are often employed for greater flexibility. Typically, such coils are removable and may be the only radio frequency coils in the system or may be receive only coils. [0027] With continuing reference to FIGURE 1, a quadrature radio frequency coil 50 is positioned between the pole pieces 12, 12', adjacent the imaging region 10. As shown in FIGURE 1, the quadrature radio frequency coil 50 is disposed such that the rungs are perpendicular to the pole pieces 12, 12'. The quadrature RF coil 50 is capable of RF transmission and/or reception in quadrature. At least one RF transmitter 42, preferably a digital transmitter, causes the quadrature RF coil 50 to transmit RF pulses into the examination region 10, exciting magnetic resonance in dipoles of interest. The quadrature RF coil 50 receives magnetic resonance signals which are demodulated by one or more receivers 52, preferably digital receivers. Signals from analog receivers are digitized with an analog-to-digital converter 54. The digitized signals are processed by a reconstruction processor 56 into volumetric or other image representations which are stored in a volumetric image memory 58. A video processor 60, under operator control, withdraws selected image data from the volume memory and formats it into appropriate format for display on a human-readable display 62, such as a video monitor, active-matrix monitor, liquid crystal display, or the like.

[0028] With reference to FIGURE 2, the quadrature RF coil 50 includes an odd number of rung elements. In the preferred embodiment, there are five rung elements, 70, 72, 74, 76, and 78. The rung elements are interconnected by end segments 80, 82, which are interrupted with capacitors C_A between each pair of rung elements. The central rung element, 74 in the preferred embodiment, is interrupted with a pair of capacitors C_V . The capacitive elements are selected such that the capacitive distribution is symmetric about a central point 84 of the coil along a direction S_A parallel to the rung element and is also symmetric about the center point in a direction S_B parallel to the end segments. It is to be appreciated that the coil 50 may be tuned to the desired frequency of interest by varying the numbers, positions, and values of capacitors around each coil. Further, it should be appreciated that the uniformity of the B_1 field will improve as more rung elements are added to the ladder coil.

[0029] The illustrated coil supports four different intrinsic resonance modes. In the preferred embodiment, the two highest resonance modes are selected for quadrature reception. Of these modes, the odd mode 90 and the even mode 92 are of particular interest. The odd

mode 90 is defined by currents flowing peripherally in a loop-like path, but divided among the rung elements to either side of the central rung element. In other words, the odd mode 90 does not carry currents on the center rung. Thus, when a capacitor is placed on the center rung, the odd mode is not sensitive to changes in capacitance. The even mode 92 is defined by two counter-rotating current loops which flow in the same direction through the central rung element 74 and are divided among the other rung elements defining the return portions of the two loops. In other words, the even mode 92 carries maximum current on the center rung so that the even mode is sensitive to capacitance changes on the center rung. The odd mode 90 is responsive to magnetic fields in the direction normal to the plane of the coil. The even mode 92 is responsive to magnetic fields which are perpendicular to the odd mode 90 and the B_0 field. The values of capacitances C_A are selected to be not only symmetric about the center point 84, but also such that the odd mode has a resonant frequency that is the same as the resonant frequency of the imaged dipole of the system. The capacitances C_V and C_A are selected to be not only symmetric about the center point 84, but such that the even mode has the resonant frequency of the dipole of interest. While in the preferred embodiment, the two resonant modes are tuned to a single frequency of interest for imaging applications, it is to be appreciated that the two modes may be tuned to different frequencies for spectroscopy applications.

[0030] The quadrature coil 50 has an output port 94 for the even mode 92 and an output port 96 for the odd mode 90. A matching capacitor C_{FV} is associated with the output port 94 for the even mode and the matching capacitor C_{FH} is associated with the output port 96 for the odd mode.

[0031] With continued reference to FIGURE 2, it is significant that the quadrature surface coil is configured as a high-pass ladder structure RF coil. The selection of the high-pass mode enables selection or use of capacitive elements having larger capacitance values than those needed for a low-pass or band-pass coil, although low-pass and band-pass coils are included within the scope of protection. These capacitors correspondingly reduce the electric field surrounding the subject, which reduces instability in coil tuning. It is to be appreciated that the size of the capacitances depends on the size of the quadrature RF coil.

[0032] With reference to FIGURES 3 and 4, and continuing reference to FIGURE 2, an embodiment of the present invention is provided where the quadrature coil 50 is non-planar. Preferably, the coil is partially wrapped around a portion of the subject 100, in the illustrated case, the head of the subject. In one embodiment, the quadrature coil is constructed of copper strips which are mounted onto a flexible support sheet, such as plastic. As shown in FIGURE 3, the rung elements or legs of the quadrature coil are parallel to the main magnetic field B_0 . The open nature of the quadrature coil facilitates

easy surgeon access to the subject through the coil during interventional procedures.

[0033] It is to be appreciated that a phased array may be obtained by overlapping several quadrature surface coils in a given direction by an amount which minimizes the mutual inductance. Those skilled in the art will recognize that the multiple distributed phased array coil covers a broader imaging region and improves the signal-to-noise ratio as compared to a single coil covering a comparable area.

Claims

1. An open magnetic resonance apparatus having an examination region (10) through which a temporally constant main magnetic field is generated, an RF transmitter (42) which transmits radio frequency pulses to a quadrature radio frequency coil (50) to excite resonance in selected dipoles in the examination region (10) such that the dipoles generate resonance signals at a characteristic resonance frequency, a quadrature radio frequency coil assembly (50) which receives the resonance signals from the resonating dipoles, and a radio frequency receiver (52) for demodulating the resonance signals received from the quadrature RF coil (50), the quadrature RF coil (50) comprising: a plurality of parallel rung elements (70, 72, 74, 76, 78) disposed parallel to the main magnetic field; electrical conductive ends (80, 82) connecting the plurality of rung elements (70, 72, 74, 76, 78); and a plurality of capacitive elements (C_A , C_V) interrupting at least one of the rung elements and ends.
2. Magnetic resonance apparatus as claimed in claim 1, wherein the quadrature RF coil (50) includes: an odd number of rung elements (70, 72, 74, 76, 78) not less than five, said rung elements (70, 72, 74, 76, 78) being disposed symmetrically about a central rung element (74).
3. Magnetic resonance apparatus as claimed in claim 1 or claim 2, wherein a central one (74) of the rung elements (70, 72, 74, 76, 78) and the ends (80, 82) are interrupted by a plurality of capacitive elements (C_A , C_V), the central rung (C_V) and end capacitive elements (C_A) being disposed symmetrically about a midpoint (84) on the central rung element (74) such that an even mode (92) is produced which is parallel to a plane of the coil (50) and an odd mode (90) is produced which is normal to the plane of the coil (50).
4. Magnetic resonance apparatus as claimed in any one of claims 1 to 3, wherein a central one (74) of the rung elements (70, 72, 74, 76, 78) and ends (80, 82) are interrupted by capacitive elements (C_A , C_V) disposed symmetrically about a midpoint (84) on the central rung element (74) such that an even mode (92) is responsive to a resonance signal component which is perpendicular to the rung elements (70, 72, 74, 76, 78) of the coil (50) and an odd mode (90) is responsive to a resonance signal component which is normal to the plane of the coil (50).
5. Magnetic resonance apparatus as claimed in claim 4, wherein the rung elements (70, 72, 74, 76, 78) of the quadrature RF coil (50) are positioned parallel to the main magnetic field such that the even mode (92) and odd mode (90) of the coil are perpendicular to the main magnetic field.
6. Magnetic resonance apparatus as claimed in claim 4 or claim 5, wherein the quadrature RF coil (50) further comprises: a first sampling port (96) electrically connected in parallel to at least one of the central rung capacitive elements (C_V) through which the even mode (92) is sampled; and a second sampling port (94) electrically connected in parallel to two of the end capacitive elements (C_A) symmetrically about the central rung element (74) through which the odd mode (90) is sampled.
7. Magnetic resonance apparatus as claimed in any one of claims 1 to 6, wherein the rung elements (70, 72, 74, 76, 78) each have a length which is substantially equal to a length of the ends (80, 82).
8. Magnetic resonance apparatus as claimed in any one of claims 1 to 7, wherein the quadrature RF coil (50) is curved such that it is partially wrapped around a portion of a subject disposed in the examination region (10).
9. A method of magnetic resonance imaging in an open MRI system in which a temporally constant main magnetic field is generated through an examination region (10) and gradient magnetic fields (36) are generated for spatial selection and position encoding, the method including:
 - (a) positioning a quadrature RF ladder coil (50), parallel to the main magnetic field, said coil supporting an even resonant mode (92) and an odd resonant mode (90);
 - (b) matching the two resonant modes (90, 92) to a common resonance frequency of dipoles of interest;
 - (c) exciting magnetic resonance in the dipoles of interest in the examination region (10);
 - (d) detecting induced magnetic resonance signals using the quadrature RF ladder coil (50);
 - (e) passing detected signals at the common imaging frequency to a receiver (52); and
 - (f) reconstructing (56) the received magnetic

resonance signals into an image representation.

10. A method as claimed in claim 9, wherein the quadrature RF ladder coil (50) includes a plurality of parallel rung elements (70, 72, 74, 76, 78) aligned with the main magnetic field, the rung elements (70, 72, 74, 76, 78) being interconnected by a pair of end segments (80, 82); a central rung element (74) being interrupted by at least one capacitive element (C_V), wherein the matching step includes: adjusting an effective reactance of at least one portion of the quadrature RF ladder coil (50) such that an even mode (92) and an odd mode (90) have peak responsivity at the common resonance frequency.

20

25

30

35

40

45

50

55

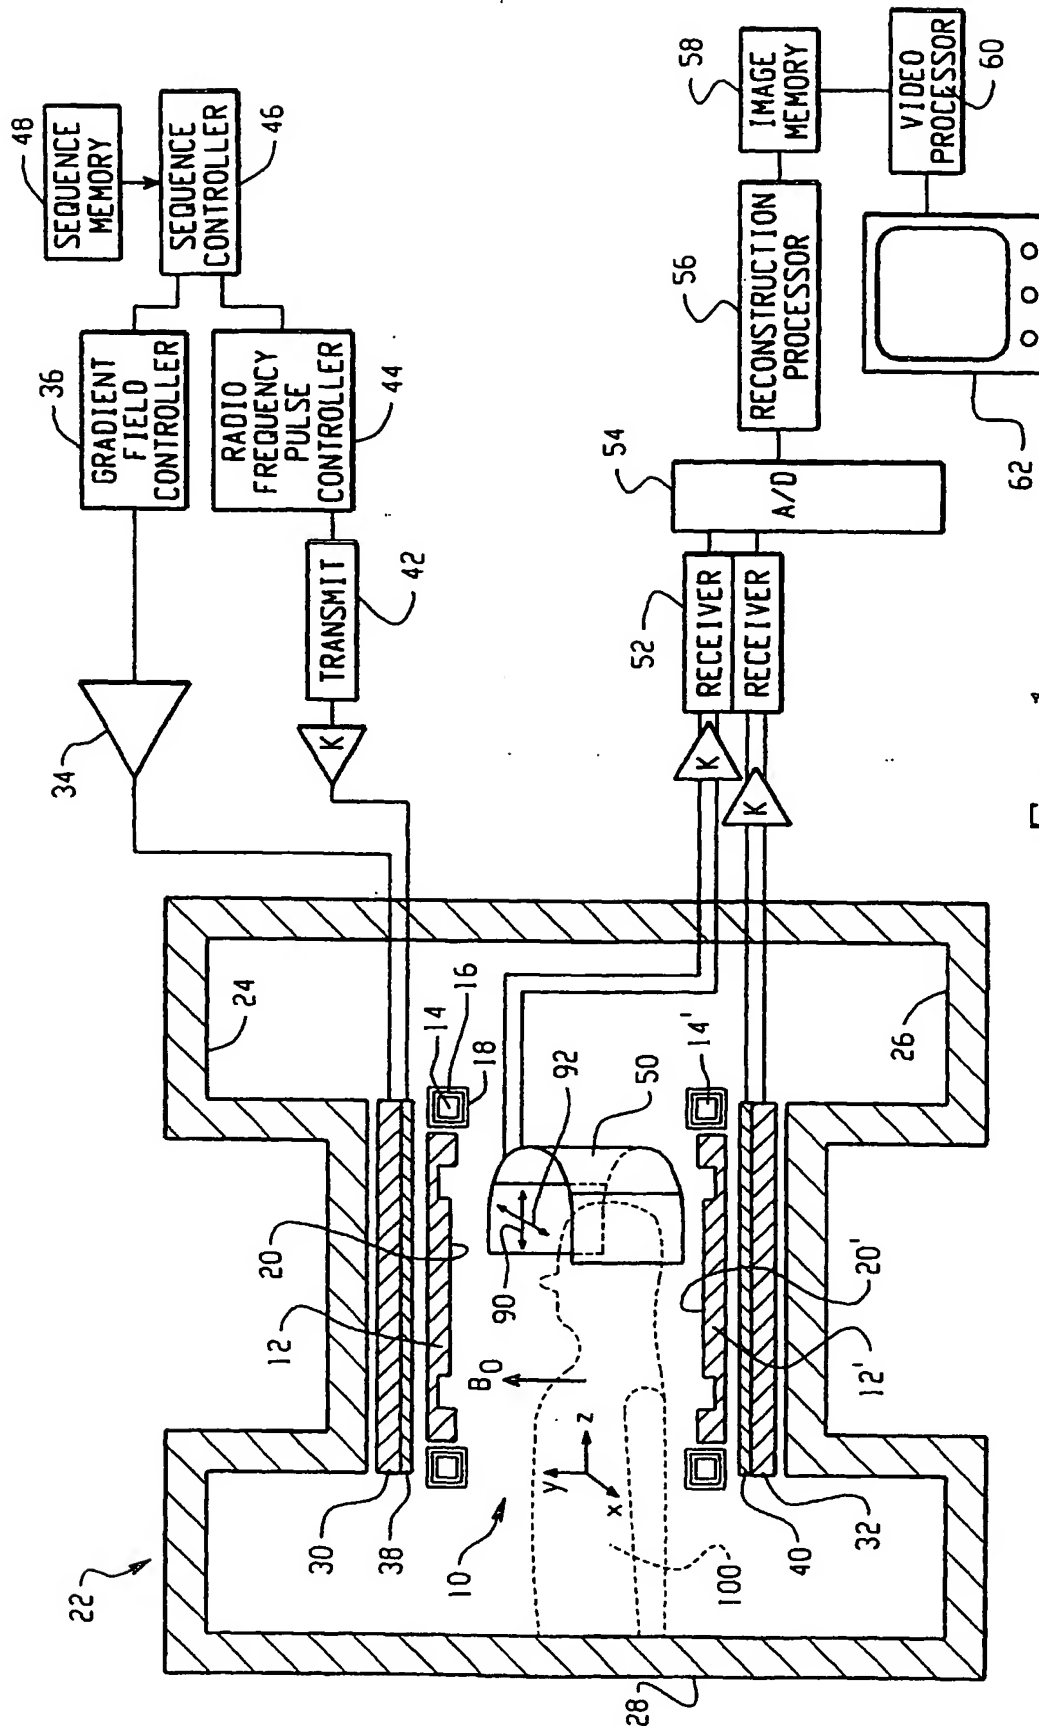


Fig. 1

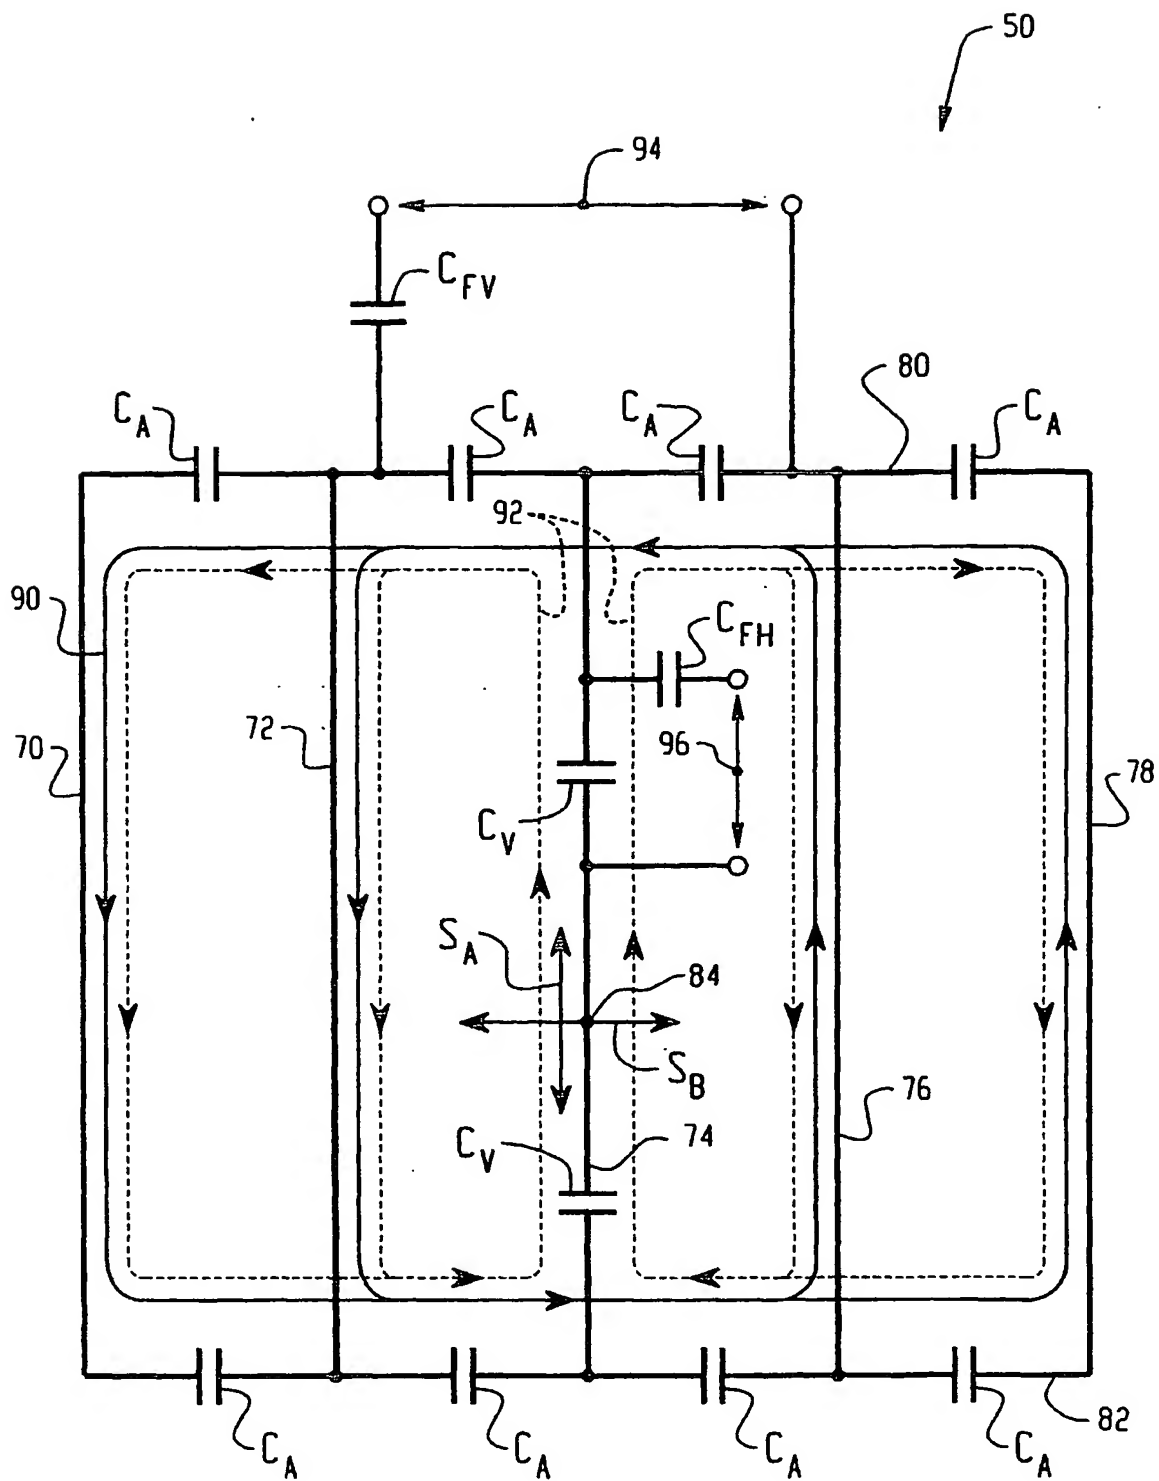


Fig. 2

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 113 286 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
02.05.2002 Bulletin 2002/18

(51) Int Cl.7: **G01R 33/34**, G01R 33/341

(43) Date of publication A2:
04.07.2001 Bulletin 2001/27

(21) Application number: **00311406.3**

(22) Date of filing: **19.12.2000**

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Fujita, Hiroyuki**
Highland Heights, Ohio 44143 (US)
• **Demeester, Gordon D.**
Wickliffe, Ohio 44092 (US)

(30) Priority: **28.12.1999 US 473070**

(74) Representative: **Waters, Jeffrey**
Marconi Intellectual Property
Marrable House
The Vineyards
Gt. Baddow
Chelmsford Essex CM2 7QS (GB)

(71) Applicant: **Marconi Medical Systems, Inc.**
Cleveland, Ohio 44143 (US)

(54) Quadrature RF coil for MRI systems

(57) A quadrature RF coil assembly (50) is employed for quadrature excitation and/or reception in an open or vertical field magnetic resonance apparatus. The quadrature RF coil (50) includes a plurality of parallel rung elements (70, 72, 74, 76, 78). A pair of electrical conductive end segments (80, 82) connect the plurality of rung elements. Capacitive elements (C_V , C_A) interrupt a central rung element and the end segments. Preferably, the capacitive elements (C_V , C_A) are arranged in a high-pass configuration such that the two highest resonant modes, an odd mode (90) and an even mode (92), are tuned to have peak responsivity to a common imaging frequency. The odd mode (90) is responsive to magnetic fields which are normal to the coil (50), while the even mode is responsive to magnetic fields which are parallel to the coil (50) and perpendicular to the main magnetic field. In one embodiment, the quadrature coil (50) is curved such that it is partially wrapped around a portion of a subject (100) with the rung elements (70, 72, 74, 76, 78) of the coil (50) parallel to the main magnetic field B_0 . The quadrature coil (50) provides improved B_1 field uniformity and greater tuning stability due to reduced localized electric field effects. The coil (50) provides greater accessibility for interventional procedures conducted in a vertical field or open magnetic resonance imaging system.

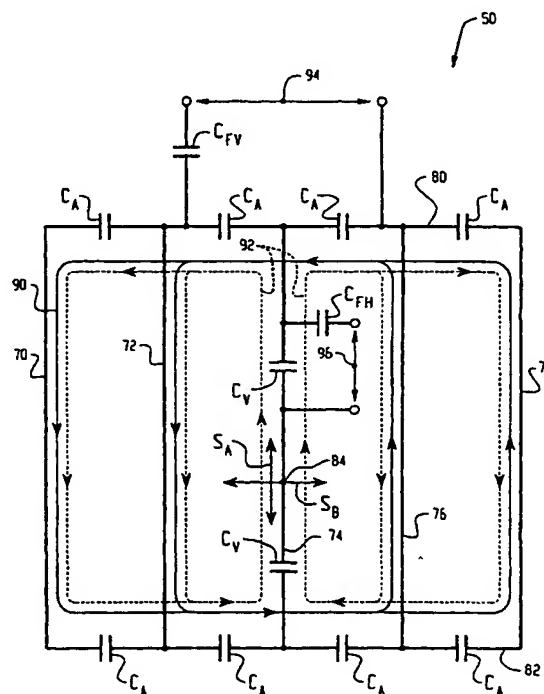


Fig. 2



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 31 1406

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X,P	EP 1 004 885 A (PICKER INT INC) 31 May 2000 (2000-05-31) see the whole document	1-10	G01R33/34 G01R33/341
X	H.FUJITA ET AL.: "An Optimized Open Quadrature Distributed RF Surface Coil" PROCEEDINGS OF THE INTERNATIONAL SOCIETY FOR MAGNETIC RESONANCE IN MEDICINE, SIXTH SCIENTIFIC MEETING AND EXHIBITION, SYDNEY, AUSTRALIA, APRIL 18-24, 1998, vol. 1, page 645 XP002188980 conference abstract	1-10	
X,D	US 5 898 306 A (LIU HAIYING ET AL) 27 April 1999 (1999-04-27) * column 3, line 61 - column 6, line 20 * * column 7, line 38 - column 8, line 67; claims 1-9; figures 1,2,5,6 *	1-10	
X	E.BOSKAMP ET AL.: "A degenerate bandpass ladder network for spine imaging in lateral magnetic fields" PROCEEDINGS OF THE INTERNATIONAL SOCIETY FOR MAGNETIC RESONANCE IN MEDICINE, SIXTH SCIENTIFIC MEETING AND EXHIBITION, SYDNEY, AUSTRALIA, APRIL 18-24, 1998, vol. 3, page 2024 XP002188985 conference abstract	1-10	TECHNICAL FIELDS SEARCHED (Int.Cl.7) G01R
X	PATENT ABSTRACTS OF JAPAN vol. 1997, no. 06, 30 June 1997 (1997-06-30) & JP 09 051887 A (GE YOKOGAWA MEDICAL SYST LTD), 25 February 1997 (1997-02-25) see figs. 11,12 * abstract *	1,3-7,9, 10	
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 5 February 2002	Examiner Lersch, W
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 31 1406

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	W.P.KUAN ET AL.: "A Comparison between Quadrature and Optimized Linear Surface Coil" WORKS IN PROGRESS, SOCIETY OF MAGNETIC RESONANCE IN MEDICINE, ELEVENTH ANNUAL SCIENTIFIC MEETING, AUGUST 8-14, 1992, BERLIN, GERMANY, page 280 XP002188981 conference abstract	1,3-6,9,10	
X	C.H.OH ET AL.: "Novel Type of Quadrature Breast RF Coil with a Ladder Structure" PROCEEDINGS OF THE INTERNATIONAL SOCIETY FOR MAGNETIC RESONANCE IN MEDICINE, SIXTH SCIENTIFIC MEETING AND EXHIBITION, SYDNEY, AUSTRALIA, APRIL 18-24, 1998, vol. 3, page 2025 XP002188984 conference abstract	1,2,7-9	
A	C.E.HAYES: "Birdcage & Other High Homogeneity Radiofrequency Coils for Whole Body Magnetic Resonance" ENCYCLOPEDIA OF NUCLEAR MAGNETIC RESONANCE, D.M.GRANT ET AL. (EDS.), JOHN WILEY & SONS, vol. 2, 1996, pages 968-974, XP002188986 Chichester see the whole article	1-10	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search MUNICH		Date of completion of the search 5 February 2002	Examiner Lersch, W
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 31 1406

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-02-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 1004885	A	31-05-2000	US 6169401 B1	02-01-2001
			EP 1004885 A2	31-05-2000
			JP 2000157512 A	13-06-2000
US 5898306	A	27-04-1999	NONE	
JP 09051887	A	25-02-1997	NONE	